



ROLLMAX LAND ROLLERS

YOUR SOLUTION TO SOIL PREPARATION AND
RESIDUE MANAGEMENT



ROLLMAX SMOOTH DRUM ROLLER

The RollMax Smooth Drum is a heavy duty land roller that is designed and manufactured in Australia to ensure premium quality and local support. The heavy-duty 16mm plate roller makes the RollMax the perfect tool for rolling stones, clods and residue in preparation for crops. For increased protection, your roller can be built with 20mm thick drums, or you can upgrade to the RollMax XH-25 roller with 25mm thick drums.



KEY FEATURES:

- » Heavy duty powdercoated frame
- » Ability to float drawbar
- » Heavy duty bearings
- » Rear transport bar to lock wings together for safer transport
- » Heavy duty truck tyres
- » Narrow transport width under 3.5m

UPGRADE OPTIONS:

- » Mud scrapers
- » 20mm drum thickness



SPECIFICATIONS	42T30	42T47	42T60	42T12	42T15	42T18
Working Width (m)	3.06	4.7	6.12	12.3	15.4	18.3
Transport Width (m)	2.42	2.42	2.49	3.5	3.5	3.5
Weight (kg)	2800	3700	4800	11 200	12 600	15 100
Drum Diameter (mm)	1060	1060	1060	1060	1060	1060
Drum Thickness (mm)	16	16	16	16	16	16
Tractor Minimum Horsepower (hp)	100	120	120	180	200	250
Tyres	265/70 x 19.5	265/70 x 19.5	385/65 x 22.5	265/70 x 19.5	265/70 x 19.5	265/70 x 19.5
Bearings	75mm replaceable bearings with 77kn static load capacity					
Warranty	1yr Warranty					


Heavy duty pins and bushes



Hydraulic fold with stay bar



Heavy duty tyres and dual wheels

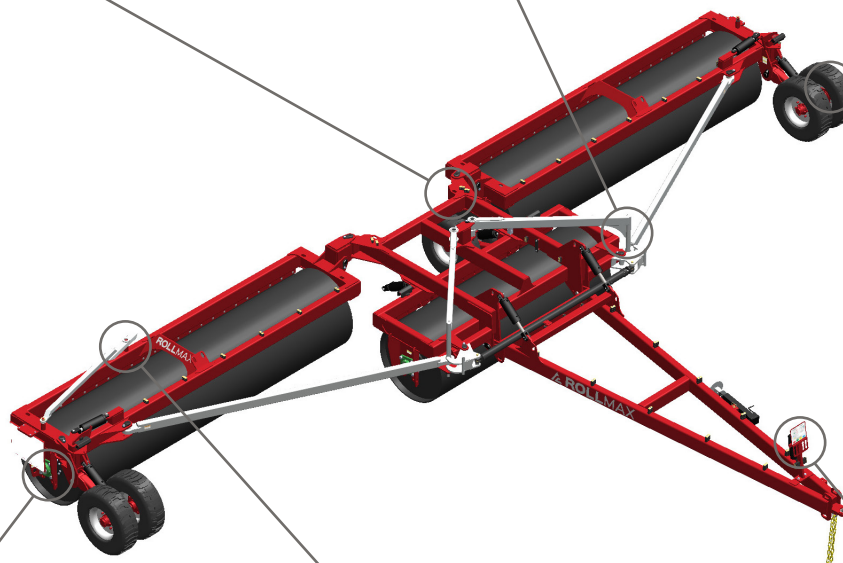


Extra heavy duty bearings and replaceable shafts



Narrow transport with rear safety bar



Colour-coded hydraulic couplings



ROLLMAX 5-PLEX ROLLER



KEY FEATURES:

- » Fully powdercoated monobeam frame
- » Ability to float drawbar
- » Heavy duty 16mm plate roller to roll stones, clods and residue
- » Ultimate ground following ability
- » Rear transport bar to lock wings together for safer transport
- » Heavy duty truck tyres

UPGRADE OPTIONS:

- » Mud scrapers

SPECIFICATIONS	42T19	42T24
Working Width (m)	19	24.8
Transport Width (m)	5.5	5.5
Weight (kg)	18 500	22 000
Drum Diameter (mm)	1060	1060
Drum Thickness (mm)	16	16
Tractor Minimum Horsepower (hp)	250	350
Tyres	385/65 × 22.5	385/65 × 22.5
Bearings	75mm replaceable bearings with 77kn static load capacity	
Warranty	1yr Warranty	



ROLLMAX XH-25 ROLLER



KEY FEATURES:

- » Extra heavy duty 25mm thick drum
- » Fully powdercoated monobeam frame
- » Ability to float drawbar
- » Heavy duty bearings
- » Rear transport bar to lock wings together for safer transport
- » Heavy duty truck tyres

UPGRADE OPTIONS:

- » Mud scrapers

SPECIFICATIONS	43T12	43T15	43T18
Working Width (m)	12.3	15.3	18.3
Transport Width (m)	4.4	4.4	4.4
Weight (kg)	16 000	17 055	20 400
Drum Diameter (mm)	1060	1060	1060
Drum Thickness (mm)	25	25	25
Tractor Minimum Horsepower (hp)	250	300	350
Tyres	385/65 × 22.5	385/65 × 22.5	385/65 × 22.5
Bearings	Heavy duty double taper roller bearings on rubber suspension		
Warranty	1yr Warranty		



ROLLMAX RESIDUE CRUNCHER

The RollMax Residue Cruncher is one of AusCuts solutions to managing residues on minimum and zero till farming systems. The Residue Cruncher is a proven tool for sizing and chopping in a broad range of crop applications, from canola, chickpea and other pulse crops, through to sunflower, corn and sorghum crops. Other springtime applications for the Residue Cruncher include rolling and chopping green manure crops for efficient breakdown and microbial activity enhancement.



KEY FEATURES:

- » Drums suspended on rubber suspension
- » Fully powdercoated monobeam frame
- » Ability to float drawbar
- » Heavy duty bearings
- » Rear transport bar to lock wings together for safer transport
- » Heavy duty truck tyres
- » Extra heavy duty double taper roller bearings



SPECIFICATIONS	42C30	42C47	42C60	42C12	42C18
Working Width (m)	3.06	4.7	6.12	12.3	18.44
Transport Width (m)	2.5	2.5	2.5	3.5	4.38
Weight (kg)	2800	3700	4800	12 500	17 700
Drum Diameter (mm)	610	610	610	830	830
Drum Thickness (mm)	13	13	13	13	13
Blade to Blade Diameter (mm)	854	854	854	955	955
Blade Size (mm)	110x12	110x12	110x12	110x12	110x12
Tractor Minimum Horsepower (hp)	100	120	120	220	300
Tyres	265/70 x 19.5	265/70 x 19.5	385/65 x 22.5	265/70 x 19.5	385/65 x 22.5
Bearings	Heavy duty double taper roller bearings on rubber suspension				
Warranty	1yr Warranty				

Heavy duty pins and bushes



Narrow transport with rear safety bar



Heavy duty tyres and dual wheels




Extra heavy duty bearings and replaceable shafts



Hydraulic fold with stay bar



Colour-coded hydraulic couplings





*Built by Australian farmers,
for Australian farmers*



19 Nangar St,
Cowra NSW 2794 Australia



P: 02 6341 3383
TOLL FREE: 1800 517 417



www.auscutglobal.com.au



hello@auscutglobal.com.au

